

## SEALLESS, END SUCTION MAGNETIC DRIVE CENTRIFUGAL PUMPS

### Magnetic drive centrifugal pump



#### FOR CORROSIVE LIQUIDS AND CHEMICAL TRANSFER

Flows to 30 L.P.M to 150 L.P.M

Heads to 3 to 15 meter

Motor k/w 45 watt to 550 watt

Temperature to 90 degree Celsius

Models available 5 model available

Material of construction polypropylene &




#### DESIGN AND FUTURE

1. Magnetic power transmission – no mechanical seal problems
2. No leakage – safe working environment and environmental friendly
3. Safe handling of hazardous fluids – seal less pump
3. No poisonous or dangerous vapors – hermetic system
4. Economical operation – high degree of efficiency and no waste of product
5. Close coupled configuration
6. No metal contact with process fluids
7. Two piece impeller and inner magnet assembly
8. Stationary self-aligning replaceable ceramic shaft
9. Simple operation and easy to maintenance

#### APPLICATION

- Acids
- Bleaches
- Caustics
- Chemical Transfer
- Cleaning And Mixing
- Filtration
- Processing
- Recirculation
- Scrubber
- Sea Water
- Solvent
- Wastewater

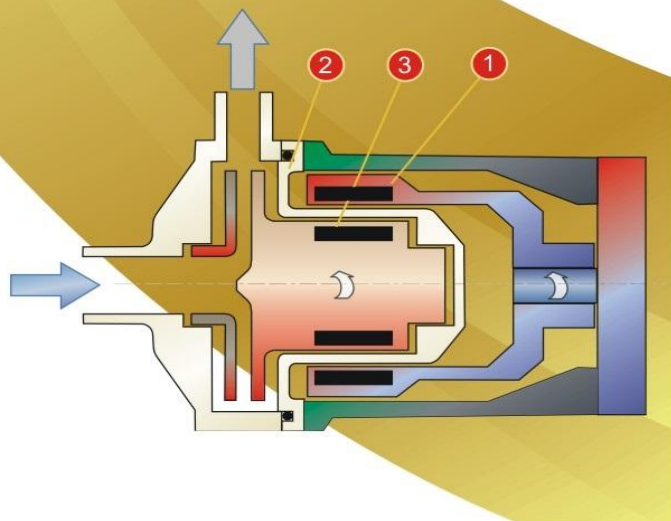

Due to content research & development data is subject to change